


Note: to purchaser all sales of Huaci products are subject to our standard terms and conditions and the limited warranties thereunder.

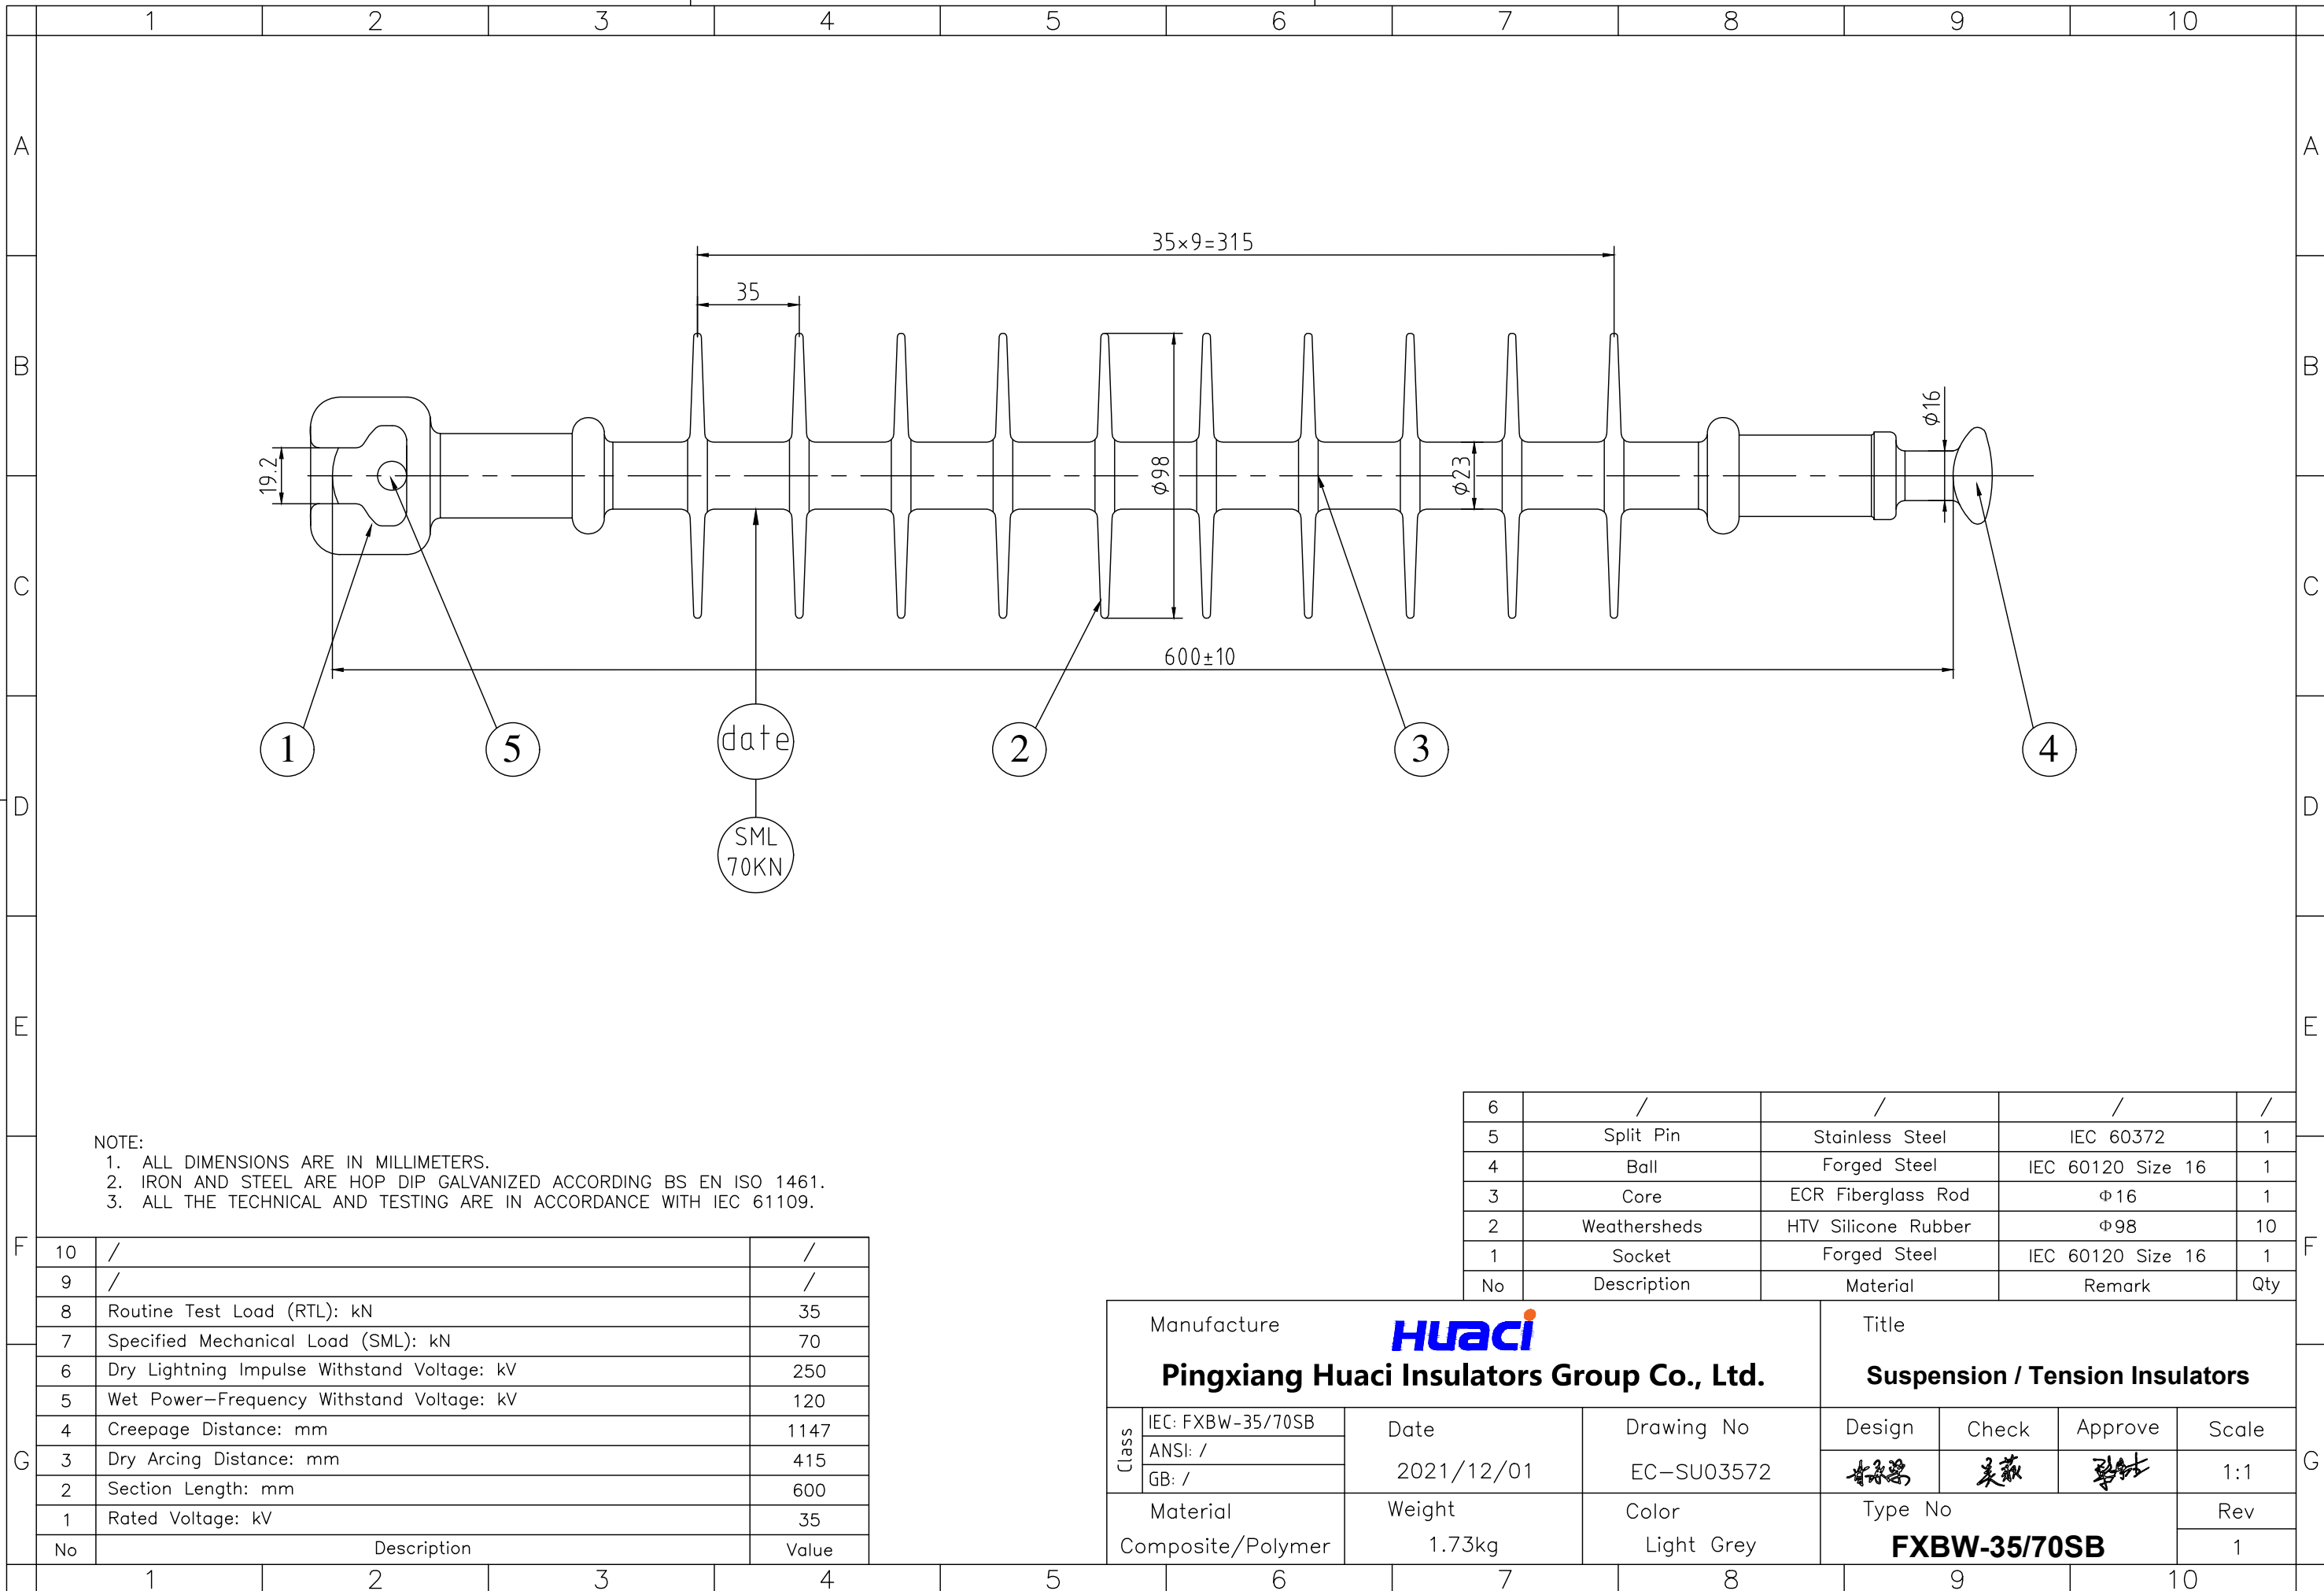

NOTE:
 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. IRON AND STEEL ARE HOP DIP GALVANIZED ACCORDING BS EN ISO 1461.
 3. ALL THE TECHNICAL AND TESTING ARE IN ACCORDANCE WITH IEC 61109.

6	/	/	/	/
5	Split Pin	Stainless Steel	IEC 60372	1
4	Ball	Forged Steel	IEC 60120 Size 16	1
3	Core	ECR Fiberglass Rod	φ16	1
2	Weathersheds	HTV Silicone Rubber	φ98	10
1	Socket	Forged Steel	IEC 60120 Size 16	1
No	Description	Material	Remark	Qty

10	/	/
9	/	/
8	Routine Test Load (RTL): kN	35
7	Specified Mechanical Load (SML): kN	70
6	Dry Lightning Impulse Withstand Voltage: kV	250
5	Wet Power-Frequency Withstand Voltage: kV	120
4	Creepage Distance: mm	1147
3	Dry Arcing Distance: mm	415
2	Section Length: mm	600
1	Rated Voltage: kV	35
No	Description	Value

Manufacture HUACI Pingxiang Huaci Insulators Group Co., Ltd.			Title Suspension / Tension Insulators				
Class	IEC: FXBW-35/70SB	Date	Drawing No	Design	Check	Approve	Scale
	ANSI: /	2021/12/01	EC-SU03572	胡志	吴薇	李	1:1
	GB: /						
Material Composite/Polymer		Weight 1.73kg	Color Light Grey	Type No FXBW-35/70SB		Rev 1	