




Note: to purchaser all sales of Huaci products are subject to our standard terms and conditions and the limited warranties thereunder.

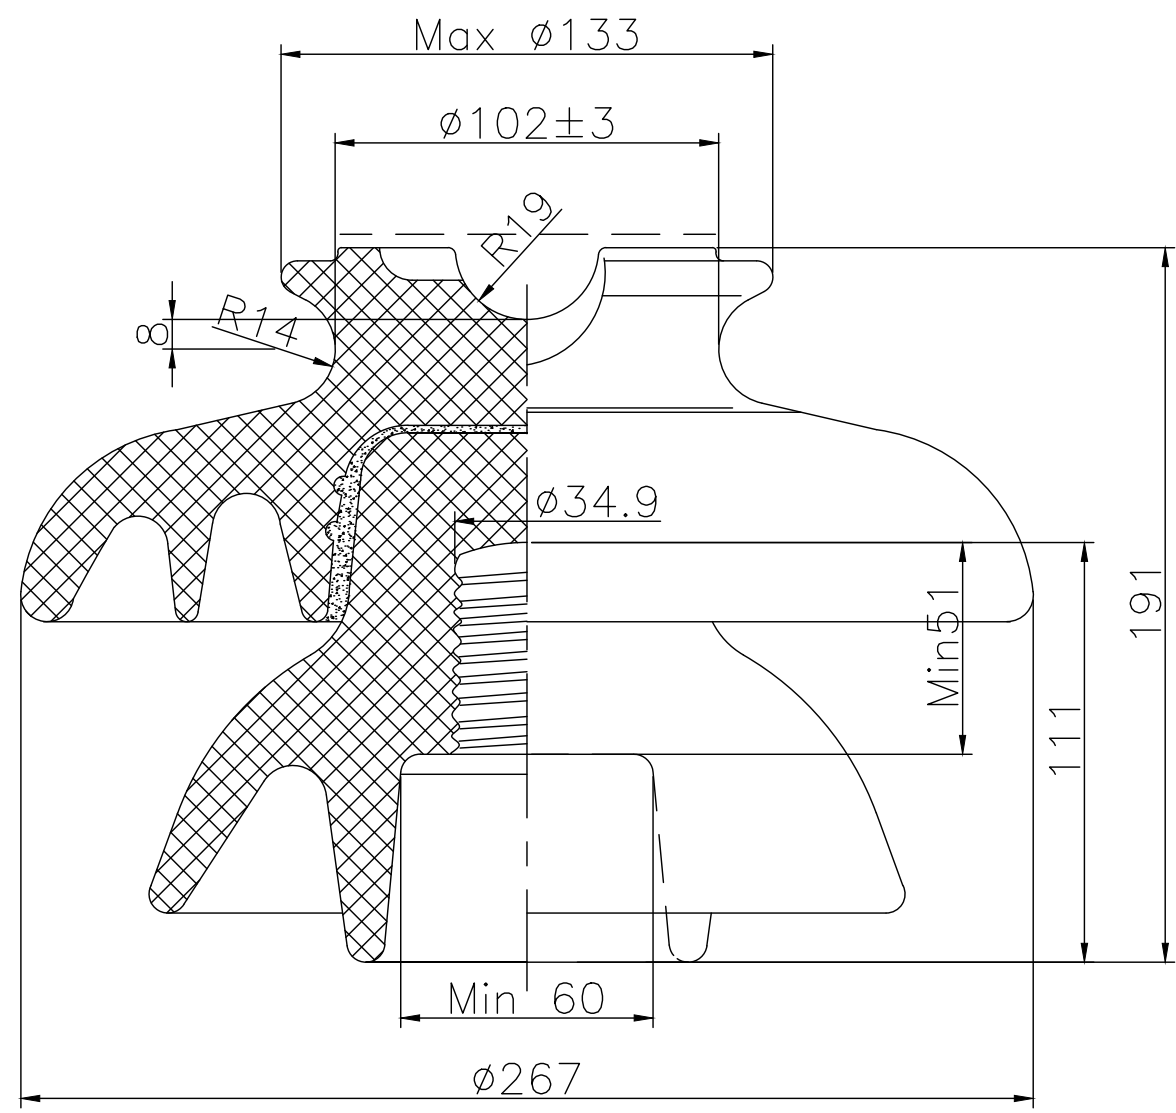

1. DIMENSIONS
  - A) DIAMETER (D): 10-1/2IN (267MM)
  - B) HEIGHT (H): 7-1/2IN (191MM)
  - C) LEAKAGE DISTANCE: 21IN (533MM)
  - D) DRY ARCING DISTANCE: 9-1/2IN (241MM)
  - E) MINIMUM PIN HEIGHT: 8IN (203MM)
2. MECHANICAL VALUES
  - A) CANTILEVER STRENGTH: 3,000LB (13KN)
3. ELECTRICAL VALUES
  - A) LOW-FREQUENCY DRY FLASHOVER VOLTAGE: 125KV
  - B) LOW-FREQUENCY WET FLASHOVER VOLTAGE: 80KV
  - C) CRITICAL IMPULSE FLASHOVER VOLTAGE, POSITIVE: 200KV
  - D) CRITICAL IMPULSE FLASHOVER VOLTAGE, NEGATIVE: 265KV
  - E) LOW-FREQUENCY PUNCTURE VOLTAGE: 165KV
4. RADIO INFLUENCE VOLTAGE
  - A) LOW-FREQUENCY TEST VOLTAGE, RMS TO GROUND: 30KV
  - B) MAXIMUM RIV AT 1000 kHz: 200  $\mu$ V

NOTE:  
 1. ALL DIMENSIONS ARE IN MILLIMETERS ACCORDING TO ANSI/NEMA C29.6  
 2. ALL THE TECHNICAL AND TESTING ARE IN ACCORDANCE WITH ANSI/NEMA C29.6

Manufacture			Title				
 <b>Pingxiang Huaci Insulators Group Co., Ltd.</b>			<b>High Voltage Pin Type Insulators</b>				
Class	IEC: /	Date	Drawing No	Design	Check	Approve	Scale
	ANSI: 56-3	2020/07/08	EP-PI05603	胡志	吴薇	李士	1:1
	GB: /						
Material		Weight	Color	Type No		Rev	
Porcelain/Ceramic		7.8kg	Brown Glazed	<b>ANSI 56-3</b>		/	